



PRODUCT SPECIFICATION

The SCA series is designed for use in all levels of security facilities and high abuse applications.

Mounting

Surface-mounts to corners.

Housing

Die-formed cold rolled steel with seams welded and ground smooth. Stainless steel available.

Door

One piece, die-formed cold rolled steel door with 14 gauge lens retainers and a full length welded pin piano hinge. Stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Hardware

Recessed, stainless steel, tamper-proof fasteners.


Wiring

Reflector-mounted electrical components for easy wiring and maintenance.

Certifications

UL Listed damp or wet location. Covered ceilings only.

Job Name \_\_\_\_\_
Fixture Type \_\_\_\_\_
Catalog No. \_\_\_\_\_
Approval \_\_\_\_\_ Date \_\_\_\_\_

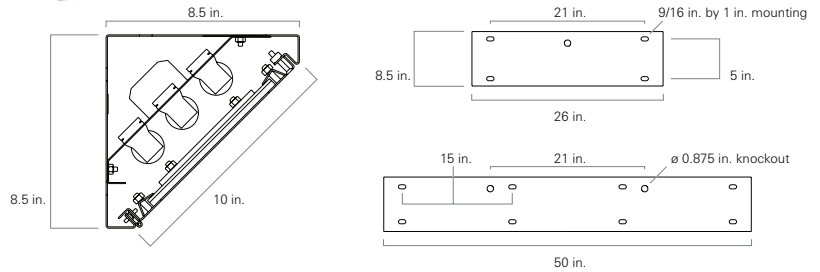

SCA [ ] one [ ] two [ ] three [ ] four [ ] five [ ] six [ ] seven [ ] eight [ ] nine [ ] ten [ ] eleven [ ] twelve [ ] thirteen [ ] fourteen

one Lamps (not included)

- 14 2 ft. 14 W T5
17 2 ft. 17 W T8
24 2 ft. 24 W T5 HO
4B 2ft. 40 W T5 biax
28 4 ft. 28 W T5
32 4 ft. 32 W T8
54 4 ft. 54 W T5 HO

two Lamp Quantity

- 1 one
2 two
3 three

three Material Gauge

- N 18 gauge, minimum security
D 16 gauge, medium security
X 14 gauge, maximum security

four Material

- C Cold rolled steel
S Stainless steel

five Finish

- R Brushed stainless steel
W White

six Voltage

- 120 120 V, 60 Hz
277 277 V, 60 Hz
347 347 V, 60 Hz
VAR Variable, 120-277 V, 50/60Hz

seven Ballast

- DM Dimming
EL Electronic Instant Start, std T8
PR Program Rapid Start, std T5, option T8

eight Internal Lens

- 53 .125 in. K12 prismatic acrylic
12 .125 in. K12 prismatic polycarbonate
15 .156 in. K12 prismatic polycarbonate
16 .187 in. K12 prismatic polycarbonate
75 .156 in. C73 prismatic tempered glass
01 .005 in. UV absorbing overlay

nine External Lens

- 30 .187 in. clear polycarbonate
32 .250 in. clear polycarbonate
36 .375 in. clear polycarbonate
38 .500 in. clear polycarbonate
90 .187 in. clear tempered glass
92 .250 in. clear tempered glass
96 .375 in. clear tempered glass

ten Door Fasteners

- AP Stainless steel allen head with pin
TP Stainless steel torx head with pin
PH Phillips head, non-security

eleven Mounting Holes

- D Ceiling and wall mounting holes
W Wall mounting holes only

twelve Electrical Access

- A 2.250 in. diameter access hole
K 0.875 in. diameter knockout(s), std

thirteen UL Listing

- D Damp Location
W Wet Location

fourteen Options

- 2C Two-circuit wired
CU Canadian UL Listing
E1 One lamp emergency ballast
E2 Two lamp emergency ballast
FH Fuse and holder
NL Night light, for 7 or 9 W PL bipin
NL-LED Night light, LED
IMS Integral Occ Sensor
PS Security push on/off switch

Modifications are available to meet custom requirements.