



## PRODUCT SPECIFICATION

The UST series is designed for ceiling surface mount cell lighting in medium, maximum and super max security detention facilities.

### Mounting

Surface mounts to ceiling.

### Clamshell Housing

One piece, die-formed cold rolled steel with seams welded and ground smooth, 14 gauge lens retainers and a full length, welded pin piano hinge. Stainless steel available.

### Back Plate

16 gauge die-formed cold rolled steel with embossed mounting holes to create a contraband drop slot / irretrievable blade trap.

### Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

### Hardware

Recessed, stainless steel, tamper-proof fasteners.

### Wiring

Reflector-mounted electrical components provide easy wiring and maintenance.

### Certifications


UL Listed damp or wet location. Covered ceilings only.

Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_ Date \_\_\_\_\_

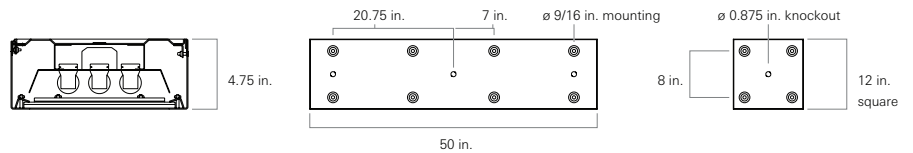

<b>one</b>	<b>Lamps (not included)</b>	<b>six</b>	<b>Voltage</b>	<b>ten</b>	<b>Door Fasteners</b>
26	1 ft. 26 W T4 quad	120	120 V, 60 Hz	AP	Stainless steel allen head with pin
14	2 ft. 14 W T5	277	277 V, 60 Hz	TP	Stainless steel torx head with pin
17	2 ft. 17 W T8	347	347 V, 60 Hz	PH	Phillips head, non-security
24	2 ft. 24 W T5 HO	VAR	Variable, 120-277 V, 50/60Hz	<b>eleven</b>	<b>Electrical Access</b>
3U	2 ft. 32 W T8 RS 6 in. U, <u>two lamp max.</u>	<b>seven</b>	<b>Ballast</b>	A	2.250 in. diameter access hole
28	4 ft. 28 W T5	DM	Dimming	K	0.875 in. diameter knockout(s), <u>std</u>
32	4 ft. 32 W T8	EL	Electronic Instant Start, <u>std T8</u>	<b>twelve</b>	<b>UL Listing</b>
54	4 ft. 54 W T5 HO	PR	Program Rapid Start, <u>std T5, option T8</u>	D	Damp Location
<b>two</b>	<b>Lamp Quantity</b>	<b>eight</b>	<b>Internal Lens</b>	W	Wet Location
1	one	53	.125 in. K12 prismatic acrylic	<b>thirteen</b>	<b>Options</b>
2	two	12	.125 in. K12 prismatic polycarbonate	2C	Two-circuit wired
3	three	15	.156 in. K12 prismatic polycarbonate	CU	Canadian UL Listing
<b>three</b>	<b>Housing Gauge</b>	16	.187 in. K12 prismatic polycarbonate	E1	One lamp emergency ballast
N	18 gauge, minimum security	75	.156 in. C73 prismatic tempered glass	E2	Two lamp emergency ballast
D	16 gauge, medium security	01	.005 in. UV absorbing overlay	FH	Fuse and holder
X	14 gauge, maximum security	<b>nine</b>	<b>External Lens</b>	NL	Night light, for 7 or 9 W PL bipin
U	12 gauge, super max, <u>CRS only</u>	30	.187 in. clear polycarbonate	NL-LED	Night light, LED
<b>four</b>	<b>Housing Material</b>	32	.250 in. clear polycarbonate	IMS	Integral Occ Sensor
C	Cold rolled steel	36	.375 in. clear polycarbonate	PS	Security push on/off switch
S	Stainless steel	38	.500 in. clear polycarbonate		
<b>five</b>	<b>Finish</b>	90	.187 in. clear tempered glass		
R	Brushed stainless steel	92	.250 in. clear tempered glass		
W	White	96	.375 in. clear tempered glass		

Modifications are available to meet custom requirements.